



Natural oiling!

Product year 20/21

Sehr geehrte Damen und Herren,

More and more people are opting for ecologically high-quality natural floors, furniture and stairs made of wood. They attach great importance to a hard-wearing, easy-care and natural surface protection. Our premium brand "OLI-NATURA Oils & Waxes" combines these positive characteristics. Surfaces treated with it are particularly breathable, create an excellent room climate and serve the well-being and health.

Our oils & waxes are based on renewable raw materials with a high content of vegetable oils and waxes, which are refined in a complex process. All "OLI-NATURA Oils & Waxes", which have the abbreviation "HS" in their name, have a high-solid content of almost 100%. Wherever a solvent content is appropriate for the application, only high-purity isoparaffin in medical quality is used, which is colloquially also called wound spirit.

We deliberately avoid biocidal agents, fragrances, preservatives, cobalt-containing compounds and oximes. This is why our "OLI-NATURA Oils & Waxes" are so well suited for allergy sufferers and children's toys. At the same time, the cured material is saliva- and sweat-proof and therefore harmless for humans, animals and plants.

Our "OLI-NATURA Oils & Waxes" - whether colourless or in colour - create beautiful surfaces which invite to look and touch with their wonderful look and feel. They are used around the globe by craftsmen and renowned manufacturers and protect high-quality solid wood floors, stairs and furniture in lofts, villas, hotels and private clinics. A coordinated, sustainable care concept ensures that the surface has a long service life.

We cordially invite you now to discover in this flyer our "OLI-NATURA Oils & Waxes", your


Götz Schubert
Managing Director


i.V. Sylke Schubert
Management



BASIC TREATMENT

- 04 | 05 OLI-NATURA HS Hard Wax Oil
- 06 | 07 OLI-NATURA Hard Wax Oil
- 08 | 09 OLI-NATURA Furniture Wax
- 10 | 11 OLI-NATURA HS Professional Oil
- 12 | 13 OLI-NATURA Project Oil
- 14 | 15 OLI-NATURA Yacht & Teak Oil
- 16 | 17 OLI-NATURA Boiled Linseed Oil
- 18 | 19 OLI-NATURA Scandic-Oil

CARE & CLEANING

- 20 | 21 OLI-NATURA Wood Soap
- 22 | 23 OLI-NATURA Wood Care Wax
- 24 | 25 OLI-NATURA Wood Care Oil
- 26 | 27 OLI-NATURA Wood-Refresher
- 28 | 29 OLI-NATURA Outdoor Cleaner
- 30 | 31 FAQ



OLI-NATURA HS Hartwachsöl



OLI-NATURA HS Hard Wax Oil

SOLVENT-FREE 1K/2K HIGH-SOLID HARD WAX OIL FOR THE PROFESSIONAL BASIC TREATMENT OF HEAVILY USED FLOORBOARDS, PARQUET, WOOD AND CORK FLOORS, STAIRS AND FURNITURE SURFACES IN THE INDOORS. ONLY ONE ORDER, IN COLOURLESS AND IN COLOUR.

- Professional quality: 100% high-solid hard wax oil for maximum wood saturation with only one application
- Solvent-free, fast curing in colourless and in colour
- Combines properties of oil and wax: The oil protects from the inside, the wax forms a durable surface film
- Chemical resistant, breathable, easy to clean, easy to repair
- For untreated, open-pore oiled or newly sanded wood types, especially suitable for solid wood floors/boards
- Can be processed with OLI-NATURA HS Hardener to accelerate the curing
- A construction product approved by the Deutsches Institut für Bautechnik (DIBt)
- Suitable for children's toys, saliva and perspiration resistant, cobalt/oxime free

Processing recommendation

The surface must be finely sanded (start with coarse sandpaper - final sanding for floors grit 100-150, furniture grit 180-240) as well as clean, dry, and free of grease and dust. Shake/stir the container well before use. Optionally, the oil can be processed with OLI-NATURA HS Hardener in a ratio of 10:1. After mixing the colourless oil has a pot life of 2-3 hours, the colour oil 1-2 hours.

In the furniture sector:

- Apply oil with a flat brush evenly and thinly in the direction of the grain. After 30 minutes in the wet phase, buff it in with white or beige pad until the surface appears evenly matt. Remove any excess oil with a cotton cloth.
- Alternatively, the oil can also be sanded into the wood with a soaked, fine grinding fleece. After a short time remove any excess oil with a cotton cloth. The surface should appear evenly matt.

In the parquet sector:

- Apply sections of oil for 5-10 m² evenly and thinly with microfibre roller, oil applicator, oil brush or flat brush. After 30-60 minutes, buff it in with a beige pad by buffing machine until the wood is saturated and appears evenly matt. For final polish and for possible excess oil remove, polish with a polishing pad/cotton cloth.

After-treatment and care: For reconditioning and care, use OLI-NATURA Wood care wax. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap.



Consumption:

1 coats, 20-40 g/sqm per coat (25-50 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust-dry after 1-2 hours and fully hardened after 2-3 days (24 hours for the 2K-HS Hard Wax). Protect the surface from water during this time.

Colours:

Nature (1), Basalt (2), Tabacco (3), Barrique (4), Smoky (5), Alaska grey, (6), Glacier grey (7), Lime white (8), Polar-white (9), Teak (10), Walnut (11), Wenge (12)

Packaging:

2,5 litres, 1 litre
Optional: OLI-NATURA HS hardener
250 ml, 100 ml

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Hartwachsöl



OLI-NATURA Hard Wax Oil

OIL-WAX COMBINATION FOR THE BASIC TREATMENT AND CARE OF FURNITURE AND TABLE SURFACES, STAIRS AND FLOORS MADE OF WOOD, CORK AND OSB INDOORS. IN COLOURLESS.

- Classic hard wax oil with 60% solid content - combines the best properties of oil and wax
- With carnauba wax - forms a breathable and resistant wax film with discreet depth of colour
- Awarded the ECARF Seal of Quality for Allergy-Friendliness
- Very easy and universal application - with and without buffing
- For all untreated and freshly sanded wood species - especially suitable for furniture, stairs, walls and ceilings
- Dirt- and water-repellent, long-lasting and easy to clean - partially freshens up without leaving a trace
- A construction product approved by the Deutsches Institut für Bautechnik (DIBt)
- ECARF-certified, food safe according to (EC) No.: 1935/2004, suitable for children's toys, saliva and perspiration resistant, cobalt-/oxim-free

Processing recommendation:

The surface must be finely sanded (start with coarse sandpaper - final sanding for floors grit 100-150, furniture grit 180-240) as well as clean, dry, and free of grease and dust. Shake/stir the container well before use.

In the furniture sector:

- Apply oil with a flat brush evenly and thinly in the direction of the grain. After 20-30 minutes in the wet phase, buff it in with white or beige pad until the surface appears evenly matt. Remove any excess oil with a cotton cloth. After drying overnight a second coat can be applied as described above.

In the parquet sector:

- Apply sections of oil for 5-10 m² evenly and thinly with mohair roller, oil applicator, oil brush or flat brush. After 20-30 minutes in the wet phase, buff it in with white or beige pad by hand or buffing machine until the surface appears evenly matt. Remove any excess oil with a cotton cloth. After drying overnight, a second coat is applied as described above.

After-treatment and care: For reconditioning and care, use OLI-NATURA Wood care wax. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap.

“

If you buff it in with a white pad in the wet phase the surface appears evenly matt.
Without buffing the hard wax oil forms a slightly shinier on the surface.

”



Consumption:

1-2 coats, 40-50 g/sqm per coat (20-25 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust-dry after 1-2 hours and fully hardened after 2-3 days. Protect the surface from water during this time.

Colours:

Nature

Packaging:

10 litres, 2.5 litres, 1 litre

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Möbelwachs



OLI-NATURA Furniture Wax

COLOURLESS FURNITURE WAX WITH NATURAL BEES AND CARNAUBA WAX FOR VELVETY SOFT WOOD SURFACES.

- Natural wax for all oiled, waxed and open-pored wood types
- With bees- and carnauba wax
- Maintains, protects and makes the surface more resistant
- Gives the wood a well-groomed appearance
- mildly smelling and suitable for toys
- Free of aromatic compounds, free of silicone, free of VOC, easily biodegradable, without terpenes
- Reclosable 125-ml screw cap can

Whether really old or trimmed to antique, whether untreated or open-pored oiled or waxed, whether stained or painted with chalk paint: The "OLI-NATURA furniture wax" is suitable for all types of wood. But before you get started, the piece of furniture must be clean and free of dust and grease. If this is an initial treatment, it is recommended to sand the surface beforehand with grit of 180 to 240. No sanding is required for furniture care or post-treatment.

- Always impregnate in a warm room. This makes the wax softer and more supple and easier to work with. Apply the wax evenly and in small circular movements with a soft, lint-free cloth or cloth ball. Do not use too much or too little wax.
- After the pores of the wood have been opened, the wax is absorbed faster or slower. Be patient and let the wax dry thoroughly.
- Finally, polish the surface thoroughly with a soft cloth. For a special shine, use a white polishing pad.
- You may prefer to apply several thin coats and allow the wax to dry thoroughly in between. The result will be much better.
- The final strength is only achieved after a few days. Please do not clean wet during this time.

Cleaning & Care: Dust and adhering dirt can be easily wiped away with a dry or slightly damp cloth. The surface should be waxed from time to time. Good indications that the surface needs care are: if the shine disappears, the water resistance decreases or the surface feels dry. Then new furniture wax should be applied.



Consumption:

1-2 coats, approx. 60 g/sqm per coat (18 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the surface will be dust-dry after 1-2 hours and fully hardened after 21 days. Protect the surface from water during this time.

Colours:

Nature

Packaging:

250 ml



OLI-NATURA HS Profiöl



OLI-NATURA HS Professional Oil

SOLVENT-FREE 1K/2K HIGH-SOLID OIL FOR THE PROFESSIONAL BASIC TREATMENT OF HEAVILY USED FLOORBOARDS, PARQUET, WOOD AND CORK FLOORS, STAIRS AND FURNITURE SURFACES INDOORS. ONLY ONE APPLICATION, IN COLOURLESS AND COLOURED.

- professional quality: 100% high-solid impregnating oil on natural oil basis for maximum wood saturation with only one application
- Solvent-free, fast curing in colourless and in colour
- Penetrates deep into the wood, creates breathable, water and dirt repellent natural oil surfaces that are long-lasting and easy to care
- For untreated, open-pore oiled or newly sanded wood types, especially suitable for wooden floors
- Can be processed with OLI-NATURA HS Hardener to accelerate the curing
- A construction product approved by the Deutsches Institut für Bautechnik (DIBt)
- Suitable for children's toys, saliva and perspiration resistant, cobalt/oxime free

Processing recommendation:

The surface must be finely sanded (start with coarse sandpaper - final sanding for floors grit 100-150, furniture grit 180-240) as well as clean, dry, and free of grease and dust. Shake/stir the container well before use. Optionally, the oil can be processed with OLI-NATURA HS Hardener in a ratio of 10:1. After mixing the colourless oil has a pot life of 2-3 hours, the colour oil 1-2 hours.

In the furniture sector:

- Apply oil with a flat brush evenly and thinly in the direction of the grain. After 30 minutes in the wet phase, buff it in with white or beige pad until the surface appears evenly matt. Remove any excess oil with a cotton cloth.
- Alternatively, the oil can also be sanded into the wood with a soaked, fine grinding fleece. After a short time remove any excess oil with a cotton cloth. The surface should appear evenly matt.

In the parquet sector:

- Apply sections of oil for 5-10 m² evenly and thinly with mohair roller, oil applicator, oil brush or flat brush. After 30-60 minutes, buff it in with or beige pad by buffing machine until the wood is saturated and appears evenly matt. For final polish and for possible excess oil remove, polish with a polishing pad/cotton cloth

After-treatment and care: For reconditioning and care, use OLI-NATURA Wood Care Oil. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap.



Consumption:

1 coats, 20-40 g/sqm per coat (25-50 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust-dry after 1-2 hours and fully hardened after 2-3 days (24 hours for the 2K-HS Hard Wax). Protect the surface from water during this time.

Colours:

Nature (1), Basalt (2), Tobacco (3), Barrique (4), Smoky (5), Alaska grey, (6), Glacier grey (7), Lime whitet (8), Polar-white (9), Teak (10), Walnut (11), Wenge (12)


Packaging:

2,5 litres, 1 litre
Optional: OLI-NATURA HS hardener
250 ml, 100 ml

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Projektöl

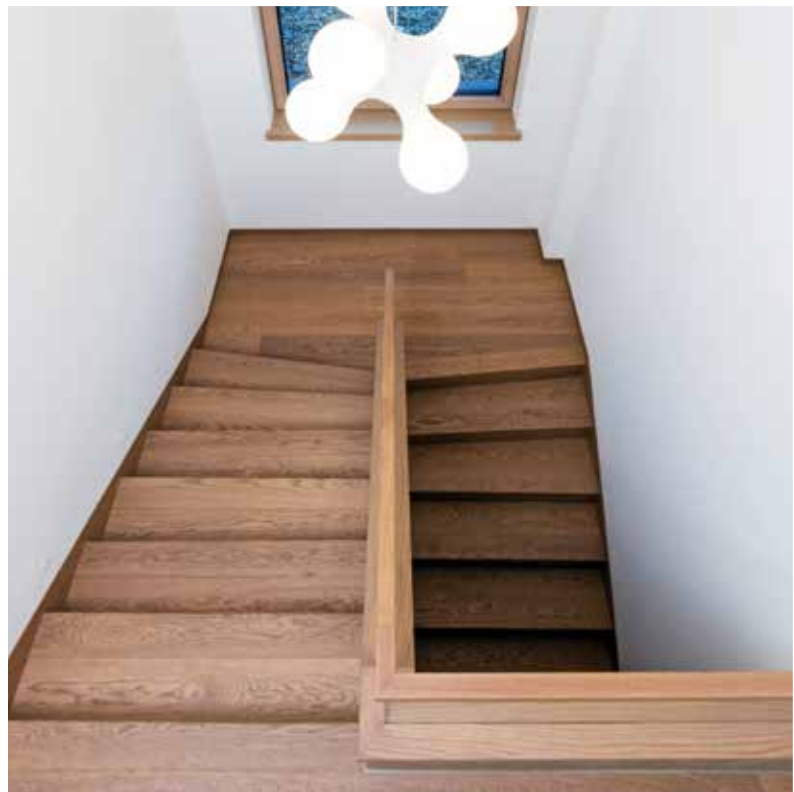

OLI-NATURA Project Oil

DEEP-ACTING UNIVERSAL OIL FOR THE BASIC TREATMENT AND CARE OF FURNITURE, STAIRS AND FLOORS MADE OF WOOD, CORK AND OSB INDOORS. IN COLOURLESS AND COLOURED.

- Universal and deep-acting impregnating oil based on natural oil with 60% solid content
- Very easy to apply - for all untreated, open-pore oiled and freshly sanded wood types
- High inherent penetration - penetrates deeply into the wood and protects it from the inside
- Breathable, dirt- and water-repellent - partially repairable
- Vibrant depth of colour - in colourless and coloured
- A construction product approved by the Deutsches Institut für Bautechnik (DIBt)
- Suitable for children's toys, saliva and perspiration resistant, cobalt/oxime free

Processing recommendation:

The surface must be finely sanded (start with coarse sandpaper - final sanding for floors grit 100-150, furniture grit 180-240) as well as clean, dry, and free of grease and dust. Shake/stir the container well before use.

In the furniture sector:

- Apply oil with a flat brush evenly and thinly in the direction of the grain. After 20-30 minutes in the wet phase, buff it in with white or beige pad until the surface appears evenly matt. Remove any excess oil with a cotton cloth. After drying overnight a second coat can be applied as described above.

In the parquet sector:

- Apply sections of oil for 5-10 m² evenly and thinly with mohair roller, oil applicator, oil brush or flat brush. After 20-30 minutes in the wet phase, buff it in with white or beige pad by hand or buffing machine until the surface appears evenly matt. Remove any excess oil with a cotton cloth. After drying overnight, a second coat is applied as described above.

After-treatment and care: For reconditioning and care, use OLI-NATURA Wood Care Oil. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap.



Consumption:

1-2 coats, 40-50 g/sqm per coat (20-25 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust-dry after 1-2 hours and fully hardened after 2-3 days. Protect the surface from water during this time.

Colours:

Nature (1), Smoky (2), Alaska grey (3), Glacier grey (4), Lime white (5), Teak (6), Walnut (7), Wenge (8)


Packaging:

10 litres, 2,5 litres, 1 litre

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Yacht & Teaköl

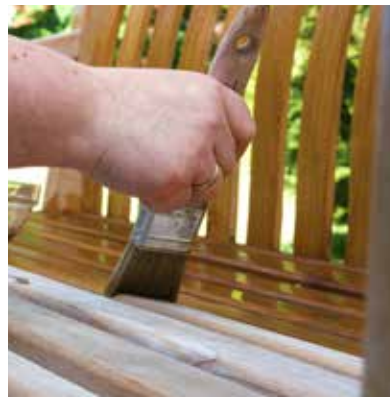

OLI-NATURA Yacht & Teak Oil

WEATHER-RESISTANT HARDWOOD OIL WITH UV PROTECTION FOR THE BASIC TREATMENT AND CARE OF YACHT DECKS, TERRACES AND GARDEN FURNITURE

- Hardwood oil for easy outdoor use
- Weather resistant and water repellent
- Penetrates deeply into the wood and thus protects it effectively against UV rays, weathering, embrittlement and greying
- Applicable for untreated, open-pore oiled or newly sanded hardwood, exotic wood (including bangkirai, teak, eucalyptus or ruby) and pressure impregnated softwood
- Especially suitable for terraces, pool surrounds, garden furniture and yacht decks
- Suitable for children's toys, saliva and sweat resistant, cobalt/oxime free

Processing recommendation:

- The wood must be clean, dry and free of grease. If the wood is very dirty we recommend to clean it with OLI-NATURA Exterior Cleaner beforehand.
- If necessary, smooth upstanding wood fibres and rough spots with fine sandpaper (grain 220).
- Shake / stir container well before use. Spread the oil evenly and thinly with a brush, roller or surface brush in the direction of the grain.
- After 20-30 minutes of exposure in the wet phase, buff it in with a white pad or cotton cloth. Possibly remove excess oil with a cotton cloth.
- In the case of very dry woods, a second coat can be applied as described above after drying overnight.

Note: Do not paint wood outdoors in damp weather or in direct sunlight!

After-treatment and care: Use OLI-NATURA Yacht & Teak Oil for reconditioning and care twice a year or as required. For maintenance cleaning we recommend OLI-NATURA Wood Outdoor Cleaner.

“

The "OLI-NATURA Yacht & Teak Oil" in the "Nature" version is not pigmented. Nevertheless, the grain and colour of the wood are clearly emphasised. It corresponds approximately to the colour of the untreated wood surface when it is wet.

The "OLI-NATURA Yacht & Teak Oil" in the "Teak" version has a pigment content and is especially adjusted to hard and exotic woods in order to support them in a colourful and discreet way.

”



Consumption:

1-2 coats, 40-80 g/sqm per coat (12-25 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust-dry after 1-2 hours and fully hardened after 2-3 days. Protect the surface from water during this time.

Colours:

Nature (colourless), Teak

Packaging:

2.5 litres, 1 litre

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Leinöl-Firnis



OLI-NATURA Boiled Linseed Oil

BIOLOGICAL SURFACE PROTECTION MADE OF PURE LINSEED OIL WITH 0,4% DRY SUBSTANCES FOR THE TREATMENT OF WOOD IN INTERIOR AND EXTERIOR AREAS. VEGAN AND SOLVENT-FREE.

- 100% solvent-free, traditional surface protection made of pure cold-pressed linseed oil
- for indoor and outdoor use
- Forms a water-repellent and resistant protective layer
- surface is breathable, easy to work over, does not flake or tear off
- For furniture, doors, worktops, wall panelling, children's toys, wooden beams and fences - also suitable for cotta tiles and cork
- Has a colour deepening effect and gives light woods a warm honey tone
- Suitable for children's toys, saliva- and sweat-proof, lead- and cobalt-free dryer

Processing recommendation:

- The surface must clean, dry, and free of grease and dust.
- Shake / stir container well before use.
- Apply the oil evenly with a paintbrush/brush/cotton cloth along the grain of the wood. Remove any excess oil with a cotton cloth after 30 minutes. The surface should appear evenly matt.
- After sufficient drying time of 16-24 hours, a second layer can be applied as described, if required.

Cleaning & Care: Use OLI-NATURA Boiled Linseed Oil for care and refreshing.

“

Excess oil that has not been completely absorbed by the wood marks itself after 30 minutes of exposure as a wet shiny puddle or spot. If this excess is not removed, these areas will dry out with a considerable time delay, remain sticky for a long time and lead to differences in gloss.

”



Consumption:

1-3 coats, 60-80 g/sqm per coat (12-17 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 21 days. Handle with care during this time.

Colours:

Nature (colourless)

Packaging:

2.5 litres, 1 litre

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Scandic-Oil



OLI-NATURA Scandic-Oil

VOC-FREE, WATER-BASED RAW WOOD EFFECT OIL FOR THE BASIC TREATMENT OF NORMALLY STRIPED WOODEN FLOORS, STAIRS AND FURNITURE IN INTERIOR AREAS.

- 100% VOC-free raw wood effect oil based on natural oils emulsified in water, healthy for living
- For the protective treatment of untreated or freshly sanded light-coloured softwoods and oak
- Particularly suitable for wooden floors, stairs, furniture surfaces or wall coverings in the living area
- Natural look, makes the wood look like untreated and freshly sanded
- surface is breathable, protected against water, easy to work over, does not flake or crack
- For professional users
- No risk of spontaneous combustion
- A construction product approved by the Deutsches Institut für Bautechnik (DIBt)
- Suitable for children's toys, saliva and perspiration resistant, cobalt/oxime free

Processing recommendation:

The surface must be finely sanded (start with coarse sandpaper - final sanding for floors grit 150, furniture grit 240) as well as clean, dry, and free of grease and dust. Shake/stir the container well before use.

In the furniture sector:

- Apply oil with a flat brush evenly and sated in the direction of the grain. After a short time in the wet phase, buff it in with a white pad only until the surface is evenly wetted and still hand-moist. Remove any excess oil with a cotton cloth. After 2 hours a second coat can be applied as described above.
- Alternatively, the oil can also be sanded into the wood with a soaked, fine grinding fleece only until the surface is evenly wetted and still hand-moist. After a short reaction time, remove any excess oil with a cotton cloth. After 2 hours, apply a second coat as described.

In the parquet sector:

- Apply sections of oil for 5-10 m² evenly and sated with microfibre roller, oil applicator, oil brush or flat brush. After a short time in the wet phase, buff it in with a white pad by hand or buffing machine only until the surface is evenly wetted and still hand-moist. Remove any excess oil with a cotton cloth. After 2 hours, a second coat is applied as described above.

After-treatment and care: For reconditioning and care, use OLI-NATURA Wood-Refresher. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap.



Consumption:

2 coats, 60-80 g/sqm per coat (12-15 sqm/l), depending on the absorptivity of the surface

Drying:

Depending on humidity and temperature, the surface is dust-dry after 1 hour and can be walked on carefully after 2 hours. Protect from water for the first 3-5 days until fully cured. Protect the surface from water during this time.

Colours:

Colourless (Raw Wood Effect)

Packaging:

5 litres, 1 litre



OLI-NATURA Holzseife



OLI-NATURA Wood Soap

GENTLE WOOD SOAP FOR ALL OILED AND HARD WAX OIL-TREATED WOOD SURFACES IN THE INTERIOR

- Gentle wood soap for regular wet cleaning of all hard wax oil treated and oiled wood surfaces
- Ensures rapid cleanliness and re-greasing
- Simply dilute some wood soap with lukewarm water
- For stubborn stains use it pure
- Contains no wax and does not form a film

Processing recommendation:

- Remove coarse dirt by sweeping or vacuuming
- Shake container well before use
- Simply add 25 ml (approx. 3 tablespoons) to 5 litres of lukewarm water or 50 ml (approx. 6 tablespoons) to 10 litres of lukewarm water
- Dip the mop in the soap solution, wring it out and wipe the surface with a damp cloth

Tip: Stubborn stains can be treated with OLI-NATURA Wood Soap pure. After a few minutes of soaking time simply wipe off with a damp cloth.

Note: Avoid standing wetness to prevent swelling in the seam and joint area.



Dry cleaning

Dust on furniture surfaces can easily be wiped off with a dry, possibly damp, but never wet cloth. Parquet floors, on the other hand, should be vacuumed or swept daily, as dirt and grime not only make parquet unattractive, but can also cause scratches. The reason for this is usually abrasive particles of dirt such as sand or small stones that are carried in the shoe tread from outside into the house.

Damp cleaning

Occasionally a wet cleaning is necessary. Normal soiling can be removed quickly with the mild "OLI-NATURA Wood Soap". Simply add some wood soap to the water, wipe the surface with a damp cloth and let it dry - that's it. In case of heavier soiling, treat stains purely, then wipe with water until damp.

Tip: Never use conventional household cleaners, as these can leach out the wood and attack the surface protection. You should also avoid over-dampness and standing wetness.



consumption:

Diluted in a ratio of 1:200 (50 ml to 10 litres of water) apply.

Packaging:

5 litres, 1 liter



OLI-NATURA Holz-Refresher



OLI-NATURA Holz-Refresher

SOLVENT-FREE HYDRO-OIL TO REFRESH AND CARE FOR ALL OPEN-PORED OILED FLOORS, STAIRS AND FURNITURE SURFACES MADE OF WOOD.

- Cares and regenerates, gives all attacked oil surfaces protection again
- Extends the life of oiled wood
- Preserves the natural colour depth of the wood
- Easy to apply with cotton cloth, weasel or sprayer
- High yield: 1 litre per coat is sufficient for approx. 40 m²
- VOC-free, mild odour, suitable for children's toys

Processing recommendation:

- Prior to any care, a prior dry cleaning and wet cleaning with OLI-NATURA wood soap is recommended.
- Shake the can well before use.
- a) Full-area reconditioning of large surfaces: Apply approx. 20-30 g/sqm (30-50 sqm/l) of wood Refresher thinly and evenly by sprayer or flat mop. Work in overlapping webs. Polish it in by hand or a buffing machine with a white pad immediately.
- b) Partial reconditioning of smaller surfaces: Soak a white pad or a cotton cloth through with wood Refresher (approx. 20-30 g/sqm) and polish it in. Remove excess oil after with a dry cotton cloth.



When to care?

A good indication of the need for care is when the water resistance of the wood diminishes or the surface feels dry and dull.

1) Care of furniture

Simply put some Refresher on a cotton cloth and wipe over the surface to be treated. Remove any excess after a short time with a cotton cloth.

2) Care of stairs

Massage Refresher sparingly into the wood with a cotton cloth or white polishing pad and remove the excess after a few minutes with a cloth.

3) Care of floors

Apply Refresher with a sprayer or wiper weasel evenly thinly and after a short reaction time massage in with a white polishing pad by hand or polishing machine.



Consumption:

1 coats, 20-30 g/sqm per coat (40 sqm/l), depending on the type of wood.

Drying:

The surface can be walked on carefully after 2 hours. Fully loadable overnight after drying. Do not wipe damp for the first few days.

Colours:

Colourless

Packaging:

1 liter



OLI-NATURA Holzpflegeöl



OLI-NATURA Wood Care Oil

FOR REFRESHING AND MAINTENANCE OF ALL NATURAL AND WHITE INDOOR OIL TREATED WOOD SURFACES

- Maintenance oil for the care and refreshment of all open-pored oiled wooden surfaces
- Also suitable for the care of factory natural oiled wood surfaces (test surface)
- Soaks into the wood, cares, regenerates and gives attacked oil surfaces back depth and luminosity
- Dirt- and water-repellent, antistatic
- Extends the life of oiled wood
- Easy to apply with a cotton cloth, polishing pad, sprayer or weasel
- High yield: 1 litre per coat is sufficient for 50-100 m
- Suitable for toys, without preservatives and fragrances

Processing recommendation:

- Prior to any care measure we recommend dry cleaning and a wet cleaning with OLI-NATURA Wood Soap. Allow the surface to dry completely.
- Shake container well before use.
- Soak white pad or cotton cloth with Wood Care Oil and massage into the wood. Remove excess after max. 10 minutes with a dry cotton cloth. No excess oil should be left behind.
- For large surfaces, apply wood care oil evenly and thinly with a sprayer or weasel, allow to work in for max. 10 minutes and polish in with a white pad by hand or polishing machine. Remove any excess oil with a cotton cloth.



When to care?

A good indication of the need for care is when the water resistance of the wood diminishes or the surface feels dry and dull.

1) Care of furniture

Simply put some Care Oil on a cotton cloth and wipe over the surface to be treated. Remove any excess after a short time with a cotton cloth.

2) Care of stairs

Massage Care Oil sparingly into the wood with a cotton cloth or white polishing pad and remove the excess after a few minutes with a cloth.

3) Care of floors

Apply Care Oil with a sprayer or wiper weasel evenly thinly and after a short reaction time massage in with a white polishing pad by hand or polishing machine.



Consumption:

10-20 g/sqm per coat (50-100 sqm/l), depending on the absorptivity of the surface

Colours:

Nature (colourless)

Packaging:

1 liter

Drying:

Allow the surface to dry for at least 12 hours before use. Do not wipe damp in the first few days.

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Holzpflegewachs



OLI-NATURA Wood Care Wax

FOR CARE AND REFRESHING OF ALL HARD WAX OIL TREATED FLOORS, STAIRS AND FURNITURE SURFACES MADE OF WOOD IN THE INTERIOR. IN COLOURLESS.

- Liquid wood care wax with carnauba wax for the care and refreshment of oiled and hardwax oil-treated Wood surfaces
- Nourishes the wood from the inside, compensates for slight damage and forms an easy-care protective film on the surface
- Dirt- and water-repellent, antistatic, refreshes the wood colour
- Easy to apply with a cotton cloth, polishing pad, sprayer or weasel
- High yield: 1 litre reaches up to 50-100 m²
- Suitable for toys, without preservatives and fragrances

Processing recommendation:

- Prior to any care measure we recommend dry cleaning and a wet cleaning with OLI-NATURA Wood Soap. Allow the surface to dry completely.
- Shake container well before use.
- Soak white pad or cotton cloth with Wood Care Wax and massage into the wood. Remove excess after max. 10 minutes with a dry cotton cloth. No excess oil should be left behind.
- For large surfaces, apply wood care oil evenly and thinly with a sprayer or weasel, allow to work in for max. 10 minutes and polish in with a white pad by hand or polishing machine. Remove any excess oil with a cotton cloth.



When to care?

A good indication of the need for care is when the water resistance of the wood diminishes or the surface feels dry and dull.

1) Care of furniture

Simply put some Care Wax on a cotton cloth and wipe over the surface to be treated. Remove any excess after a short time with a cotton cloth.

2) Care of stairs

Massage Care Wax sparingly into the wood with a cotton cloth or white polishing pad and remove the excess after a few minutes with a cloth.

3) Care of floors

Apply Care Wax with a sprayer or wiper weasel evenly thinly and after a short reaction time massage in with a white polishing pad by hand or polishing machine.



Consumption:

10-20 g/sqm per coat (50-100 sqm/l), depending on the absorptivity of the surface

Colours:

Nature (colourless)

Packaging:

1 liter

Drying:

Allow the surface to dry for at least 12 hours before use. Do not wipe damp in the first few days.

Note: Cloths/pads soaked with oil can ignite spontaneously due to heat build-up! Therefore clean them immediately after use or store them under water. The product itself is not self-igniting.



OLI-NATURA Holz-Außenreiniger



OLI-NATURA Outdoor-Cleaner

FOR INTENSIVE BASIC CLEANING OF WOODEN YACHT DECKS, TERRACES AND GARDEN FURNITURE.

- Highly effective cleaning concentrate, use diluted
- Suitable for untreated or oiled wood such as garden furniture, yacht decks or terraces
- Cleans thoroughly, quickly and gently weathered wooden surfaces
- Removes green film
- Low odour

Processing recommendation:

- Sweep, vacuum or brush off coarse soiling
- Mix the exterior cleaner with warm water in a ratio of 1:4 and apply it generously to the wood with a nylon brush or Scotch-Brite™ sponge
- After approx. 20 minutes, loosen the dirt and green coating with the nylon brush or a Scotch-Brite™ sponge. Repeat treatment in case of severe weathering.
- Finally, rinse with plenty of water and allow to dry completely. As the wood is somewhat leached out after this treatment, if necessary, smooth any standing wood fibres and rough spots with fine sandpaper (220 grain).
- Impregnate the surface with OLI-NATURA Yacht & Teak Oil as required



Packaging:
1 litre

Application:
Diluted in a ratio of 1:4
apply. 1 litre gives 4 litres
ready-to-use mixture.



Answers to frequently asked questions

COLOUR TONE OF AN OILED OBJECT

In this flyer we have illustrated various »OLI-NATURA Oils & Waxes« on oak to give you an impression of the colours. Of course, the pictures shown are only a guide and are subject to the restrictions of the printing process. Therefore they can differ from the original in colour and grain. Here are some more LookBook-infos:

- The colour tone of an oiled object depends on several factors: on the kind, condition and colour of the wood, the individual working method of the user and of the wood-sanding.
- The »OLI-NATURA Oils & Waxes« in »Nature« version are not pigmented. Nevertheless, the grain and colour of the wood are emphasised. The level of emphasis depends on the type of oil and the type of wood used.
- The coloured »OLI-NATURA Oils & Waxes« bring colour to the wood. Their pigments maintain the structure of the wood and give the surface a natural colour. At the same time, the UV-stable colour pigments help to counteract the natural colour change of the wood as long as possible.
- The „OLI-NATURA Oils & Waxes“ in the »Lime white« version contain white pigments which counteract the emphasizing of the wood. The appearance of the wood is lightened (limed), the pores are subtly coloured white and stand out on the surface
- The »OLI-NATURA Oils & Waxes« in the »Polar White« version contain a high percentage of white pigments, which results in a distinct brightening of the wood.
- The standard colours from a product range can be mixed together without any problems, so that a wide variety of colours is available. • The surface preparations should always be carried out cleanly in order to achieve an optimum surface result.
- In order to obtain the correct colour impression, it is best for the user to create a sample.

ODOUR

The inherent odour is an essential property of naturally drying oils and oil-wax systems based on natural oil, which is particularly noticeable during oxidation. The odour is perceived differently and is also dependent on the type of wood and the surface size. However, after the oil has completely hardened, the smell also disappears. Good ventilation accelerates the hardening of the oil.

RISK OF SPONTANEOUS COMBUSTION

Particular attention should be paid to oil-soaked cloths and cloths that can ignite spontaneously due to heat build-up. This is because naturally drying oils harden by absorbing oxygen from the air. This produces heat which is normally released into the environment and is completely harmless. In oil-soaked and crumpled rags, cloths, pads or sponges, however, the heat cannot escape, so that in the worst case they can ignite spontaneously. You should therefore never leave oily cloths around carelessly, but hang them outside soaked with water and leave them to dry. Treated in this way, they can be disposed of safely after drying. Alternatively, oil-soaked cloths and sponges can also be stored under water or temporarily stored in an airtight container.

AVOID STICKY SURFACE

Excess oil that is no longer absorbed by the wood and cannot be massaged in must be removed while still wet with an absorbent, lint-free cotton cloth. If the layer is too thick, the oil no longer hardens properly and, in the worst case, remains on the surface as a sticky film. This results in a considerable delay in drying.

“

That, what the wood absorbs, it must get.

That, what the wood does not absorb must be removed again when still wet.

”

CLEAN BRUSHES

For cleaning brushes and tools after the application of OLI-NATURA Oils and Waxes use OLI-NATURA Oil Thinner or Cleaner and Thinner based on white spirit. A general exception is OLI-NATURA Scandic Oil. Here, normal water is sufficient for cleaning.

DIFFERENCE BETWEEN DRYING AND FULL CURING

In the drying phase, the oil is not yet fully oxidized, but it has dried sufficiently to allow further work. Depending on the type of oil, the oil needs a few days to harden completely. As the oil hardens by absorbing oxygen from the air, good ventilation and high temperatures promote the oxidative reaction. Low air movement, increased humidity conditions and low temperature can slow down the curing process.



Notes:

Please note that some of the products shown in the brochure are not available from some dealers. In this case please contact the manufacturer via www.oli-lacke.de.

Oli Lacke is constantly working to improve the properties, processing and manufacture of the products, so that changes are possible. Although documents are updated regularly, the information described in this brochure may be subject to change. The colour samples shown here may be subject to the limitations of the printing process and are not binding. They are only intended as approximate indications.

For more information, please contact your dealer or contact us by phone or e-mail.

Changes and errors excepted: Status: 11.06.2020 Photo credits: Oli Lacke GmbH, istock, Stocki

Händler/distributor:



WEBSEITE

Oli Lacke GmbH

Bahnhofstraße 22

09244 Lichtenau

Germany

Fon +49 (0) 37208/84 0

info@oli-lacke.de

www.oli-lacke.de

Oli Lacke GmbH
09244 Lichtenau
Germany