



No WOOD NEEDS MORE OIL!



Oli Lacke GmbH

Bahnhofstraße 22
09244 Lichtenau
Germany

Fon: 49 (0) 37208 / 84-0
Fax: 49 (0) 37208 / 84-382
E-Mail: info@oli-lacke.de
Web: www.oli-lacke.de

OLI-NATURA Oils and Waxes are:

- Applicable on virtually all wood types
- Easy to apply
- Highly productive; only one to two applications are necessary
- Partially repaintable and thus extremely repair-friendly
- Visually appealing and colour-intensifying
- Breathable, moisture-regulating and therefore producing a healthy room climate
- Suitable for both public and domestic areas

- The natural oils: The oil is absorbed into the pores and protects the wood from the inside. The oils does not form a film.



- The oil-/wax combinations: The oil protect the wood from the inside, the wax is forming a resistant film on the surface.



NATURAL OILING

OLI-NATURA products are high-quality oils and waxes based on natural plant oils and close-to-nature raw materials for the protection of indoor and outdoor woodwork. Our oils and waxes are custom-made to meet the demands of the professional user, and they have ideal product and handling characteristics.

All „OLI-NATURA Oils & Waxes“ are developed and manufactured by us. Many crucial steps are carried out „by hand.“ Our aim is to incorporate the essential characteristic, „Made in Germany“, in our products. In order to keep this promise of quality, each product is examined in our in-house research and development department with regard to these quality standards before it reaches the customer. It is a matter of course that „OLI-NATURA Oils & Waxes“ contain neither biocidal active substances nor preservatives, and are produced without cobalt-containing compounds or oximes. Once hardened, the material is safe for humans, animals and plants. All „OLI-NATURA Oils & Waxes“ comply with the standards DIN EN 71-3 (safety of toys) and DIN 53160 (resistance to perspiration and saliva). At the same time, our floor oils are approved by the German Institute for Building Technology (DIBt) as construction products.

This brochure gives you an overview over our OLI-NATURA product range for craftsmen use.



OLI-NATURA Hartwachsöl (Hard Wax Oil)

Hard Wax Oil for basic treatment of floors, stairs, doors and furniture surfaces made of wood, cork and OSB board. For interior in colourless.

- Combination of oil and wax with a solid content of 60%
- Preserves the wood from the inside, forming an open-pored, breathable film
- Exceptional protection - extremely stain resistant, water and dirt repellent, non-slip, easy to maintain and easy to repair,
- Lends a beautiful look and feel to the wood - only discreetly emphasises the natural colour of the wood
- Particularly uniform creation of gloss - with or without to buff
- Easy-to-use formula - makes it very easy to roll, brush, and spray
- Efficient: 1-2 coats of 40-50 g/m² each (1 litre is sufficient for 20-25 m² per coat)
- allergy-friendly (ECARF-certified), DIBt-certified, cobalt-/oxime-free, safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration)

Step by step:



1. The surface must be finely sanded, clean, dry, and free of grease and dust (Final sanding for floors: grit 100-150, for furniture: grit 180-240).



2. Shake the container well. Working in sections, pour the oil for 5-10 sqm (40-50 g / sqm depending on type of wood) on the surface and spread thinly and evenly with a flat brush, microfibre roller or whitewash brush.



3. a) For the basic treatment of floors/stairs: After a drying time of 30-45 mins. buff it in by hand or a single-disc/rotary machine equipped with a white pad until the surface appears uniformly matt. After 6-8 hours, repeat the application as described above.

b) For the basic treatment of furniture/table tops: In general, 1 coat is sufficient. It is not necessary to buff it in using a pad. Remove any excess oil with a cotton cloth after max. 10 minutes.



4. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 2-3 days. Protect it from water during this time.

Coloures: Nature (Colourless)

Packaging: 30, 3, 1 litre(s)

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code



AWT-Video



AWT-Video





OLI-NATURA Projektöl (Project Oil)

Deep-acting oil for basic treatment and care of floors, stairs, doors and furniture surfaces made of wood, cork and OSB. For interior in uncoloured or coloured.

- Universal-oil - it based on linseed oil with a solid content of 60%
- No film formation - it is drawn deeply into the wood and protects it reliably from the inside
- Durable, dirt- and water-repellent - easy to maintain and easy to repair
- A warm emphasising of the natural colour of the wood
- In nature (colourless) or coloured (intermixable)
- Easy-to-use formula - makes it very easy to roll, brush, and spray
- Efficient: 1-2 coats of 40-50 g/m² each (1 litre is sufficient for 20-25 m² per coat)
- DIBt-certified, cobalt-/oxime-free, safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration)

Step by step:



1. The surface must be finely sanded, clean, dry, and free of grease and dust (Final sanding for floors: grit 100-150, for furniture: grit 180-240).



2. Shake the container well. Working in sections, pour the oil for 5-10 sqm (40-50 g / sqm depending on type of wood) on the surface and spread thinly and evenly with a flat brush, mohair roller or whitewash brush.



3. After a drying time of 20-30 minutes buff it in by hand or a single-disc/rotary machine with a white pad until the surface appears uniformly matt. Remove excess oil with a cotton cloth, or a squeegee from larger areas.



4. After a drying time of 4 to 6 hours, do a final polishing with a cotton cloth or a rotary machine with a white pad.

5. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 2-3 days. Protect it from water during this time.

Coloures: Nature (uncoloured), Smoky, Alaska grey, Glacier grey, Lime white, Teak, Walnut, Wenge


Packaging: 30, 3, 1 litre(s)

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code



AWT-Video

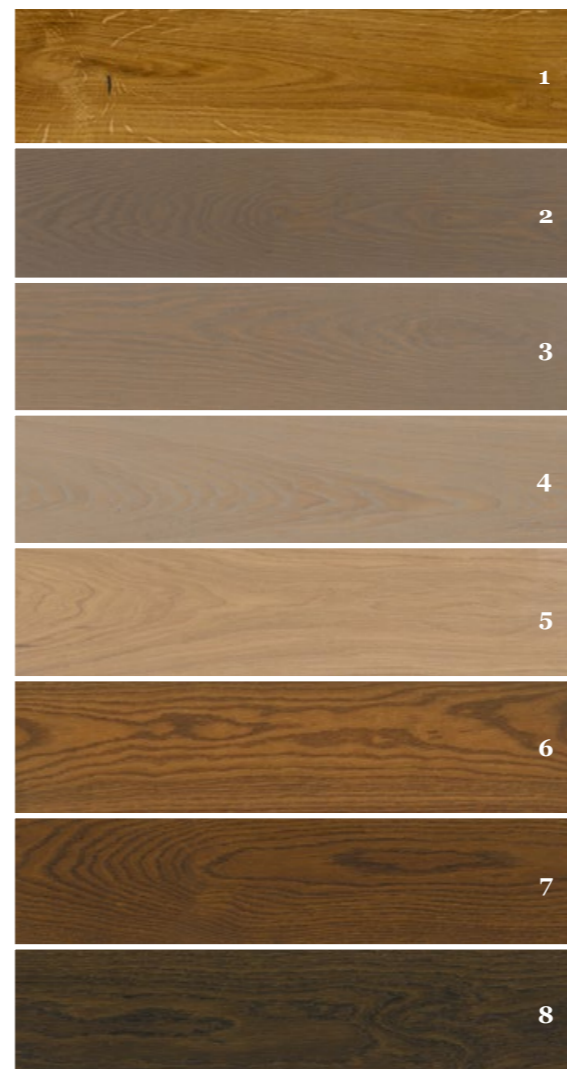



OLI-NATURA Leinöl-Firnis (Boiled Linseed Oil)

A biological surface protector made of pure linseed oil with 0.4% dry substance for the protection of indoor and outdoor wood.

- 100% solvent-free, traditional surface protection from pure cold-pressed linseed oil
- Applicable on virtually all wood types - indoor and outdoor
- The surface is breathable, provides good protection against water and is easy to rework.
- For furniture, doors, worktops, wall coverings, Children's toys, beams, fences etc. - for cotta tiles and cork surfaces also
- Gives light wood a warm honey tone
- 1-2 coats of 60-80 g/m² each (1 litre is sufficient for 12-17 m² per coat)
- Safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration)

Step by step:



1. The surface must clean, dry, and free of grease and dust.
2. Shake the container well. Apply the oil evenly with a paintbrush/brush/cotton cloth along the grain of the wood. Remove any excess oil with a cotton cloth after 30 minutes. The surface should appear evenly matt.



3. After sufficient drying time of 16-24 hours, a second layer can be applied as described, if required.
4. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 21 days. Handle with care during this time.



Note: Excess oil, which has not been absorbed completely by the wood, will show up after 30 minutes after contact as a wet-shiny area. If the excess oil is not removed, these areas will take a considerable amount of time to dry, they will remain sticky for a long time and may produce differences in gloss.

Coloures: Nature (uncoloured)

Packaging: 1 litre

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code





OLI-NATURA Yacht- & Teaköl (Yacht & Teak Oil)

Weather-proof hardwood oil with uv protection for the basic treatment and care of yacht decks, terraces, and garden furniture.

- 1 litre of natural wood oil for easy application for 12-25 m² wood surface area (varies based on wood)
- Weather-resistant and water-repellent
- The oil draws deep into the wood and protects it effectively against UV rays, weathering, embrittlement and greying/fading
- Can be used on hardwood, exotic wood (including bankirai, teak, eucalyptus or robinia), and pressure impregnated softwood
- Particularly suitable for patios, pool surrounds, garden furniture and yacht decks
- Without biozide - Therefore also suitable for interior use, cobalt-/oxime-free, safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration)

Step by step:



1. The wood must be clean, dry and free of grease. For the treatment of weathered wood, we recommend an initial cleaning with OLI-NATURA Outdoor Cleaner. If necessary, sand down fibres sticking out or rough areas with fine sand paper (grit size 220).



2. Shake the container well. Working in sections, pour the oil for 5-10 sqm (40-80 g/sqm depending on type of wood) on the surface and spread thinly and evenly with a flat brush, mohair roller or whitewash brush in the direction of the wood grain.



3. After a drying time of 20-30 minutes buff it in by hand with a white pad or remove any excess oil with a cotton cloth until the surface appears uniformly matt.

4. In case of heavily weathered and highly absorbent wood, repeat the application

5. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 2-3 days. Protect it from water during this time.

Note: Do not apply in damp weather or in direct sunlight.

Coloures: Nature (uncoloured), Teak

Packaging: 3, 1 litre(s)

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code





OLI-NATURA HS Hartwachsöl (HS Hard Wax Oil)

High-solid hard wax oil for the professional basic treatment of high-traffic floorboards, parquet, wood and cork floors. For interior in uncoloured.

- Combination of oil and wax with a high-solid content of almost 100%
- Protects the wood from the inside, forming an open-pored, durable, water-repellent and silk-mat waxfilm on the surface
- Enhances the grain and the natural colour of the wood
- Ideal for large surfaces: 60-90 minutes until to buff
- Processing with single-disc/rotary floor machine recommended
- Very efficient: 1 coats with 20-40 g/m² (1 litre is sufficient for 25-50 m²)
- DIBt-certified, cobalt-/oxime-free, safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration) Processing with single disc recommended

Step by step:



1. The surface must be finely sanded, clean, dry, and free of grease and dust (Final sanding for floors: grit 100-150, for furniture: grit 180-240).



2. Shake the container well. Working in sections, pour the oil for 5-10 sqm (20-40 g/sqm depending on type of wood) on the surface and spread thinly and evenly with a flat brush, microfibre roller or whitewash brush.



3. After a drying time of 60-90 minutes buff it in by hand or a single-disc/rotary floor machine equipped with a white pad until the surface appears uniformly matt. Tip: A final polishing with a rotary floor machine equipped with a felt pad further densifies the surface and enhances its look.



4. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 2-3 days. Protect it from water during this time.

Coloures: Nature (uncoloured)

Packaging: 3, 1 litre(s)

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code





OLI-NATURA HS Profiol (HS Professional Oil)

High-solid-oil for the professional basic treatment of high-traffic floorboards, parquet, wood and cork floors. For interior in uncoloured or coloured.

- Natural oil based on linseed oil, with a high solids content of almost 100%
- It hardens in the wood, therefore creating a highly resistant, dirt- and water-repellent natural oil surface
- Breathable, antistatic, easy to maintain and easy to repair
- Emphasising of the natural colour of the wood, natural feel and ultra matt finish - uncoloured or coloured
- Processing with single-disc/rotary floor machine recommended
- Very efficient: 1 coats of 20-40 g/m² (1 litre is sufficient for 25-50 m²)
- DIBt-certified, cobalt-/oxime-free, safety of toys DIN EN 71-3, DIN 53160 (resistant to saliva and perspiration)

Step by step:



1. The surface must be finely sanded, clean, dry, and free of grease and dust (Final sanding for floors: grit 100-150, for furniture: grit 180-240).



2. Shake the container well. Working in sections, pour the oil for 5-10 sqm (20-40 g / sqm depending on type of wood) on the surface and spread thinly and evenly with a mohair roller, brush or spatula.



3. After a drying time of 20-30 minutes buff it in by a single-disc/rotary floor machine equipped with a green pad until the surface appears uniformly matt. After a drying time of 4 to 6 hours, do a final polishing with a cotton cloth or a rotary floor machine equipped with a white pad.



4. Depending on the air humidity and temperature, the oiled surface will be dust dry after 1-2 hours and fully wear-resistant after 2-3 days. Protect it from water during this time.

Coloures: 1 Nature (uncoloured), 2 Basalt, 3 Tobacco, 4 Barrique 4 Smoky, 5 Alaska grey, 6 Glacier grey, 7 Lime white, 8 Polar white, 9 Teak, 10 Walnut, 11 Wenge


Packaging: 3, 1 litre(s)

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.

TDS-QR-Code



AWT-Video

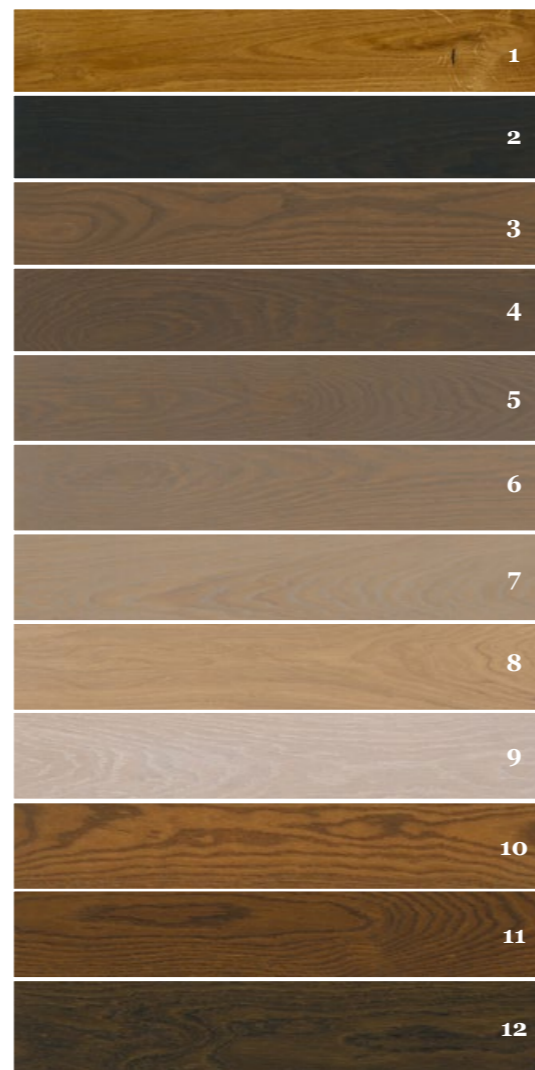



OLI-NATURA Holzpflegewachs (Wood Care Wax)

For refreshing and maintenance of all natural indoor hardwax oil treated wood surfaces. In uncoloured.

- Wood care wax with carnauba wax for maintenance and refreshment of all hard wax oil-treated wood and cork floors, stairs and furniture surfaces
- Forming an easily maintained film and compensates for slight damage
- Easy to apply with a cotton cloth, a white pad or spray
- Efficient: 1 litre is sufficient for 50-100 sqm
- For a healthy room climate, without preservatives or fragrances, suitable for use on toys
- **Coloures:** Nature (uncoloured) / **Packaging:** 1 litre



OLI-NATURA Holzpflegeöl (Wood Care Oil)

For refreshing and maintenance of all natural and white indoor oil treated wood surfaces. In uncoloured and white.

- Care oil based on linseed oil, to maintain and refresh all open-pored oiled wood and cork floors, stairs and furniture surfaces
- Cares and regenerates, gives attacked oiled surfaces depth again prolongs the life-time of wood
- Enhances the grain and the natural colour of the wood
- Efficient: 1 litre is sufficient for 50-100 sqm
- For a healthy room climate, without preservatives or fragrances, suitable for use on toys
- **Coloures:** Nature (uncoloured), White / **Packaging:** 1 litre

Step by step:



1. The surface must be clean, dry, and free of dust. For regular mopping and removing stubborn stains, use OLI-NATURA Wood Soap.



2. Shake container well before use. Give wood care wax on a white pad or cotton cloth and buff it into the surface (10-20 g/m²). Remove excess oil with a dry cotton cloth after a maximum of 10 minutes.



3. For large surfaces, apply evenly with a sprayer or a waxing mop. After 10 minutes polish it in by hand with a white or use a single-disc machine.



4. Allow the surface to dry for at least 12 hours. Do not use a wet mop on it for the first few days.

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.



Step by step:



1. The surface must be clean, dry, and free of dust. For regular mopping and removing stubborn stains, use OLI-NATURA Wood Soap.



2. Shake container well before use. Give wood care oil on a white pad or cotton cloth and buff it into the surface (10-20 g/m²). Remove excess oil with a dry cotton cloth after a maximum of 10 minutes.



3. For large surfaces, apply evenly with a sprayer or a waxing mop. After 10 minutes polish it in by hand with a white or use a single-disc machine.



4. Allow the surface to dry for at least 12 hours. Do not use a wet mop on it for the first few days.

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.





OLI-NATURA Holzseife (Wood Soap)

Gentle wood soap for all indoor oiled and hard waxed oiled wood surfaces. It has a pleasant fragrance and ensures quick cleaning and moisturising, without drying out the wood surface.

- Gentle wood soap for all indoor oiled and hard waxed oiled wood surfaces. It has a pleasant fragrance and ensures quick and cleaning and moisturising, without the wood surface drying out.
- Concentrated Wood soap (50 ml soap to 10 l water) - 1 l is enough for 15-30 m²
- For stubborn stains, treat the surface with undiluted Wood soap
- Contains no wax and does not form a film
- **Packaging:** 1 litre(s)



OLI-NATURA Holzaußenreiniger (Outdoor Cleaner)

For the intensive basic cleaning of yacht decks, terraces and garden furniture.

- Applicable for untreated or oiled wood such as garden furniture, yacht decks or terraces
- Cleans thoroughly, quickly, gently weathered wood surfaces
- Removes green cover
- Low odor
- Packaging: 1 litre(s)

Step by step

- Remove coarse dirt by sweeping or vacuuming.
- Shake well before use.
- Approximately 50 ml Wood soap to 10 liters of clear water.
- Wipe the surface with a well wrung out mop, sponge or cloth.

Note: For the removal of spots or other sticking dirt, treat the surface with undiluted Wood soap and then remove the dirt residues with a wrung out cloth. Do not leave stairs and hardwood flooring damp or wet for longer periods of time.



step by step

- Remove coarse dirt by sweeping, vacuuming or brushing off.
- Dilute the outdoor cleaner with warm water at a ratio of 1 to 4 and spread it generously on the wood with a nylon brush or Scotch-Brite™ sponge.
- After a drying time of 20 minutes, remove dirt and green growth with a nylon brush or Scotch-Brite™ sponge. Repeat the treatment in case of heavily weathered wood.
- Rinse the surface profusely with water and allow it to dry completely. Since the wood is slightly exhausted after the treatment, you should sand down fibres sticking out and rough areas with fine sand paper (grit size 220)



Oli Lacke GmbH
09244 Lichtenau
Germany



Fon +49(0) 37208 840
info@oli-lacke.de
www.oli-lacke.de