

DRY CLEANING



Daily cleaning of oiled / hard wax oil-treated floors should be carried out dry with a broom or vacuum cleaner.

WET CLEANING



For regular cleaning, wipe your floor with "OLI-NATURA Wood Soap". This ensures quick cleanliness and refatting without drying out the wood or and damage the surface protection. Slightly soiled floors in the living area should be wiped with OLI-NATURA wood soap at least once a month. In particularly heavily used objects with a lot of public traffic it is recommended to carry out a wipe care at least once a week.

CARE & MAINTENANCE



From time to time the oiled or hard wax oil-treated wood should be given some restorative treatment and maintenance. This will renew the protective effect and buff out slight scratches. Previously hard wax oil-treated surfaces should be treated at regular intervals with „OLI-NATURA wood care wax“. Oiled wood, however, should be restored with „OLI-NATURA wood care oil“ or „OLI-NATURA wood care refresher“. Refreshing and maintenance should be carried out at regular intervals, depending on the wear and tear of the floor, but at least once a year.

BASIC CLEANING

A manual or mechanical basic cleaning is only necessary if the floor shows heavy, firmly adhering soiling which can not be removed with the maintenance cleaning. The basic cleaning should only be carried out by a specialist. In addition, a basic cleaning should be carried out as little as possible. After every basic cleaning a subsequent refreshment or basic treatment is necessary. For basic cleaning, »OLI-AQUA CLEAN 15.97 l parquet floor cleaner« is suitable.



General information

Depending on the floor's exposure to wear, the impregnating coat naturally wears out after a certain time. Therefore, regular care is absolutely necessary. Wood is a natural product. It permanently changes its volume and adjusts to the room's humidity. During the heating period, the relative humidity decreases significantly. The wood reacts to this situation by emitting its own moisture so that it starts to contract. This process is visually

recognizable by gap formation in the parquet floor. The longer and the more intensely you heat your rooms, the dryer becomes the air and the more gaps are forming. The widest gaps are mostly to be expected towards the end of the heating period. At the end of summer they are generally a lot smaller or closed again. In order to do something against gap forming, you may, for instance, hang humidifiers to your radiators and/or have an adequate amount of plants in your house.

- The inside climate must be obeyed: a room temperature of 20°C and a relative humidity of 55-65%.
- Leave your freshly impregnated floor at least 2-3 days until you expose it to its normal wear or start caring it.
- Do not use steel wool or sharp cleaning pads.
- Dirt and sand can be like sandpaper on your floor and have to be removed immediately.
- For cleaning and care you should only use high-quality products that are compatible with each other.
- By defining large dirt collecting areas in front of the entrance, you can achieve an effective reduction of dirt on your floors.
- In order to avoid scratches, you may put pieces of felt under your seating furniture. If you have furniture with rollers, the floor should be protected with mats.

Even a floor needs care:

The natural character and warmth of the wood are particularly effective on parquet floors treated with OLI-NATURA oils & waxes. They bring a charming look and feel on the wood and score at the same time with high resistance. The surface is reliably protected against penetrating moisture and dirt. In addition, the wood remains breathable, which positively influences the indoor climate.

To ensure that your parquet stays beautiful for a long time and that you enjoy your floor for many years, it must be maintained and cleaned regularly and above all properly. A coordinated care concept ensures a long service life and sustainability of the surface. Please heed this nursing instruction. Your wood and parquet floor will thank you and develop an ever more beautiful and natural patina over time.

If you have any questions, please contact your parquet recliner. In addition to professional advice, you will receive everything you need to properly care for and clean parquet floors.

We wish you much pleasure with your floor


Oli Lacke GmbH!

Presented by / Stamp / Signature

Oli Lacke GmbH
Bahnhofstr. 22 | 09244 Lichtenau
Tel. +49 (0) 37208/84-0 | Fax +49 (0) 37208/84-382
info@oli-lacke.de | www.oli-lacke.de



Care of oiled / waxed wooden floors

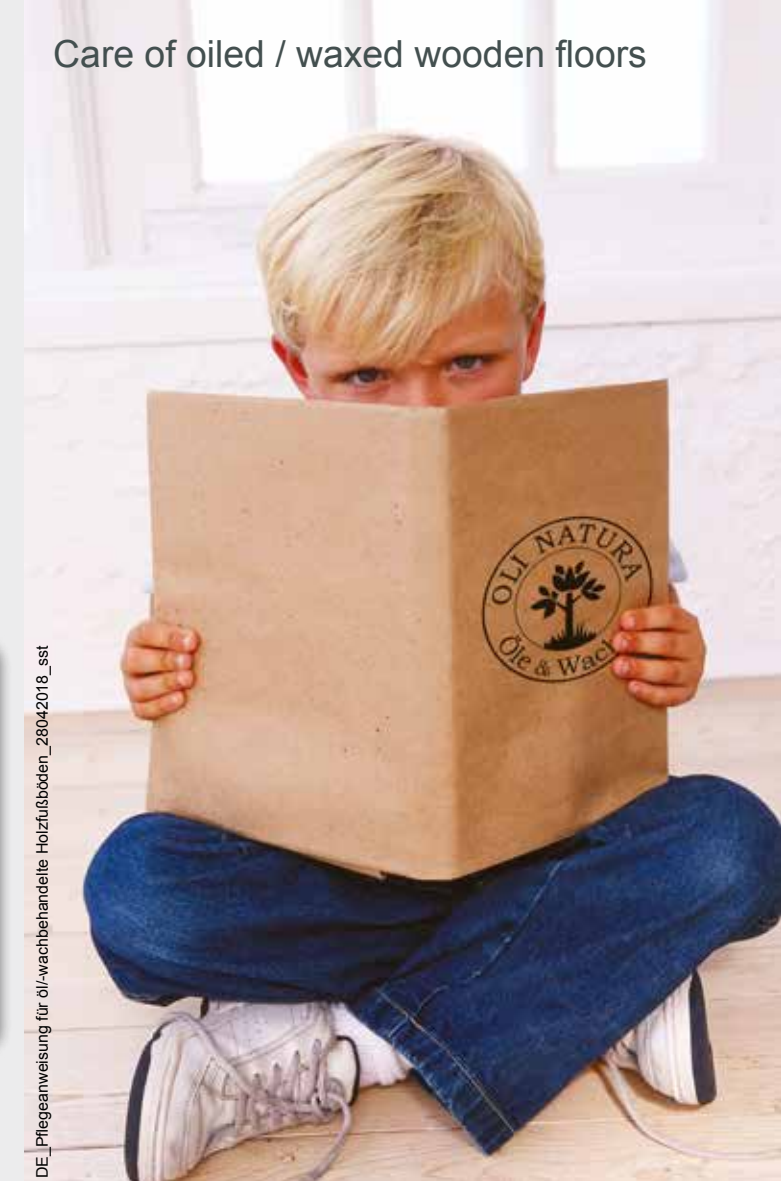

DE_Pflegeanweisung für öl-/wachbehandelte Holzfußböden_28042018_sst



WET CLEANING

OLI-NATURA Wood-Soap

GENTLE WOOD SOAP FOR ALL INDOOR OILED AND WAXED WOOD SURFACES LIKE PARQUET AND CORK FLOORS.

OLI-NATURA Wood-Soap is a soap-based concentrate for the regular wiping of all oiled and hard wax treated wood floors. The gentle wood soap ensures for a quick and cleaning and refatting of the floor. Simply add wood soap into the water, wipe the surface and let it dry - done. Slightly soiled floors in the living area should be wiped with OLI-NATURA Wood-Soap at least once a month. In particularly heavily used objects with a lot of public traffic it is recommended to carry out a wipe care at least once a week.

Step by step:

- Remove coarse dirt by sweeping or vacuuming.
- Shake well before use.
- Simply 25 ml wood soap (about 3 tablespoons) to 5 liters of lukewarm water or 50 ml wood soap (about 6 tablespoons) to 10 liters lukewarm water.
- Wipe the surface with a well wrung out mop, sponge or cloth.

Tip: Stubborn stains or other sticking dirt, treat the surface with undiluted Wood soap and then remove the dirt residues with a wrung out cloth.

Note: Do not leave hardwood flooring damp or wet for longer periods of time. An over humidification should generally be avoided. Conventional household cleaners should never be used because they dry out the wood and can damage the surface protection.



Technische Daten

QR-Code scannen



REFRESHING & MAINTENANCE // OILED FLOORS

OLI-NATURA Wood-Refresher

ESPECIALLY FAST DRYING HYDRO-OIL FOR REFRESHING AND MAINTENANCE OF ALL OPEN PORED OIL TREATED FLOORS MADE OF WOOD.

So that your oiled wood floor and your Scandic-oiled parquet always look fresh and beautiful, it is important to maintain the surface regularly and as needed. The "OLI-NATURA Wood Refresher" renews the protective effect and ensures a water-repellent surface without changing the color of the wood. In addition, the Wood-Refresher nourishes and cares for the wood, is easy to process, has a mild odor, is solvent-free and is characterized by high environmental compatibility.

Step by step:

- Prior to any care, a prior dry cleaning and wet cleaning with OLI-NATURA wood soap is recommended.
- Shake the can well before use.
- Apply approx. 20-30 g/sqm of Wood-Refresher thinly and evenly by sprayer or flat mop. Work in overlapping webs. Polish it in by hand or a buffing machine with a white pad immediately.
- The surface will be carefully walkable after 2 hours. Fully walkable after drying over night. Protect it from water during this time.

Tip: Slight damage in the oiled wooden surface can be reworked easily. The area concerned can easily be partially sanded and oiled. Simply soak a white pad or a cotton cloth through with Wood-Refresher (approx. 20-30 g/sqm) and polish it in. Remove excess oil after with a dry cotton cloth.



Technische Daten

QR-Code scannen



REFRESHING & MAINTENANCE // OILED FLOORS

OLI-NATURA Wood-Care-Oil (Oiles Floors)

NATURAL CARE-OIL FOR REFRESHING AND MAINTENANCE OF ALL OPEN-PORED OIL TREATED FLOORS MADE OF WOOD AND CORK.

So that your oiled wood floor parquet always look fresh and beautiful, it is important to maintain the surface regularly and as needed. The OLI-NATURA Wood Care Oil regenerates and nourishes the surface in one, compensates for slight damage and gives the floor depth and luminosity again. It is equally suitable for factory-oiled surfaces (preliminary test required). It can be applied on the entire surface as well as partially.

Step by step:

- Prior to any care, a prior dry cleaning and wet cleaning with OLI-NATURA wood soap is recommended
- Shake container well before use.
- Apply approx. 10-20 g/sqm of Wood-Care Oil thinly and evenly by sprayer or flat mop. After approx.. 10 minutes polish it in by hand or a buffing machine with a white pad. Remove excess oil with a dry cotton cloth.
- Allow the surface to dry for at least 12 hours. Do not use a wet mop on it for the first few days.

Tip: Slight damage in the oiled wooden surface can be reworked easily. The area concerned can easily be partially sanded and oiled. Simply soak a white pad or a cotton cloth through with Wood-Care-Oil (approx. 10-20 g/sqm) and polish it in. Remove excess oil after with a dry cotton cloth.

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.



Technische Daten

QR-Code scannen



REFRESHING & MAINTENANCE // HARD-WAX OILED

OLI-NATURA Wood Care Wax

NATURAL WOOD CARE WAX FOR REFRESHING AND MAINTENANCE OF ALL OPEN PORED HARDWAX OIL TREATED WOODEN FLOORS.

Depending on the wear and tear, it may be necessary to care the floor with OLI-NATURA Wood Care Wax from time to time. In addition, it is also suitable for the care of UV-oiled surfaces (create test surfaces). The wood care wax forms a protective and easy-care film and compensates for slight damage. This gives the surface its silky matt appearance. It can be applied on the entire surface as well as partially.

Step by step:

- Prior to any care, a prior dry cleaning and wet cleaning with OLI-NATURA wood soap is recommended
- Shake container well before use.
- Apply approx. 10-20 g/sqm of Wood-Care Wax thinly and evenly by sprayer or flat mop. After approx.. 10 minutes polish it in by hand or a buffing machine with a white pad. Remove excess oil with a dry cotton cloth.
- Allow the surface to dry for at least 12 hours. Do not use a wet mop on it for the first few days.

Tip: Slight damage in the oiled wooden surface can be reworked easily. The area concerned can easily be partially sanded and oiled. Simply soak a white pad or a cotton cloth through with Wood-Care-Wax approx. 10-20 g/sqm) and polish it in. Remove excess oil after with a dry cotton cloth.

Note: Cloths, pads or wood dust soaked with oil can spontaneously ignite due to heat build-up, therefore please clean immediately after use or store under water.



Technische Daten

QR-Code scannen